


End-on Format
 Stage 9.5m W x 4.4m / 5.2m D approx
 Stage headroom approx 4.4m to lanterns, 5.2m to grid
 Room height to ceiling beams 5.03m and to apex 8.31m approx

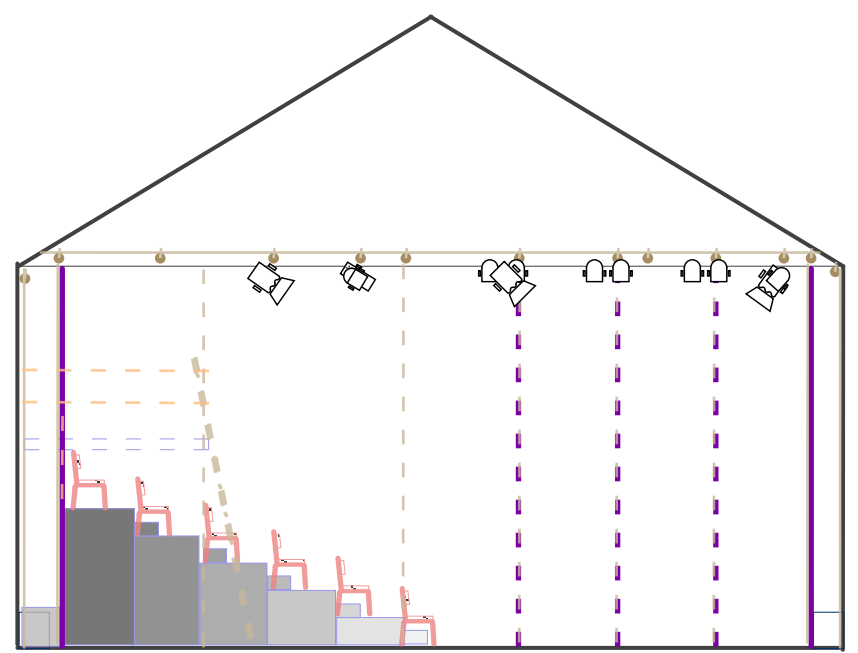

- key
- escape route sign (maintained)
 - bulkhead or downlight (maintained)
 - bulkhead (non-maintained)
 - houselight
 - working light (white)
 - working light (blue)
 - fittings/furniture
 - internal screen/display board
 - truss
 - scaffolding at grid height
 - scaffolding upright
 - solid barrier ground to 900mm
 - black drape
 - openable black drape on track
 - header drape over doorway
 - seats (fixed)
 - seats (can be removed by arrangement)

rostra/steeldeck/step heights

- +180mm
- +360mm
- +540mm
- +720mm
- +900mm
- +1080mm
- +1260mm
- +1440mm
- +1620mm
- +1800mm

lighting

- 575W/650W Profile wide angle zoom
- 650W Fresnel
- 1kW Fresnel
- 2kW Fresnel
- Source Par MFL 575W
- Source Par WFL 575W
- Par 64 CP62 1kW
- * re-focusable and re-gellable lantern
- S re-gellable lantern – shutters may be adjusted
- N re-gellable lantern
- 203 gel number (Lee Filters/Rosco E-Colour)
- #367 gel number (Roscolux/Rosco Supergel)

C venues ltd accepts no liability for any inaccuracies
 This plan is provisional and subject to change

For further information please contact C venues on
 +44 (0)845 260 1030 or email production@cvenues.com

Copyright © C venues ltd – plan updated 25 July 2016

